


SHEET RUN-OUT CONVEYOR

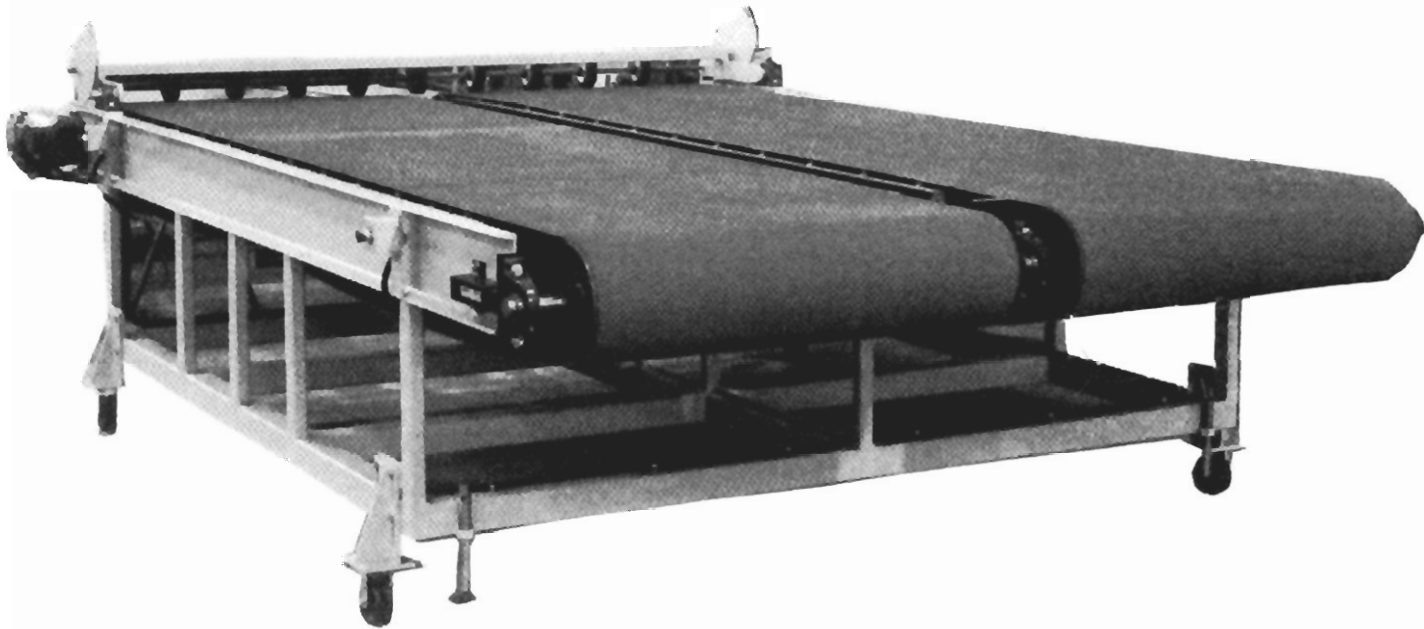

GENERAL DESCRIPTION:

- Designed to convey flat sheet away from a shear or cutting station
- Belt conveyor transfers sheet for manual stacking or delivery to automated stacking equipment

MODELS AVAILABLE:

Sheet Width (inches)	Maximum Sheet Length (inches)			
	72	96	120	144
48	ROT46	ROT48	ROT410	ROT412
72	ROT66	ROT68	ROT610	ROT612
120	ROT106	ROT108	ROT1010	ROT1012
144	ROT126	ROT128	ROT1210	ROT1212

FRAME:

- Precision heavy wall tubing, plate, and structural sections
- Rigid V-groove casters for adjustable height track mounting and floor locks
- Nominal line height is 42 inches

CONVEYOR BELT:

- Integral belt guide system for positive tracking and take-up
- Fabric construction with soft, non-marking cover

ELECTRICAL SERVICE REQUIRED:

- 230/1/60

DRIVES AND CONTROLS:

- On and off switch for conveyor belt drive
- Speed control potentiometer for conveyor belt
- Nominal line speed -3 to 60 fpm \pm 2% with 95% load change
- 1/2 to 1 HP motor with DC/SCR drive

OPTIONS:

- Adjustable reflective photoelectric unit and mounts for providing a signal to actuate a shear or other equipment
- Electrical other than 230/1/60
- Custom belt coverings
- Inspection table positioned under conveyor; maximum extension is 24" less than conveyor belt length

Vulcan Machinery Corporation

20 North Case Ave., Akron, Ohio 44305
Phone: 330-376-6025 Fax: 330-376-2172